

# AutoFlush®

## with Visual Indicators (LED's)

For Sloan and Zurn  
Flush Valves

402022 Urinal-White  
402023 Toilet-White  
402027 Urinal-Chrome  
Finish  
402026 Toilet-Chrome  
Finish

For Coyne & Delany  
Flushboy Valves

402025 Urinal-White  
402024 Toilet-White  
402028 Urinal-Chrome  
Finish  
402029 Toilet-Chrome  
Finish

Case Pack: 6  
Case Weight: 15-20 lbs.  
Case Cube: .91

### Retrofit Automatic Flushing Unit


No need to replace your current investment of flush valves or move plumbing rough-in to accommodate ADA compliance. Installing battery operated automatic flushing device onto your existing flush valves makes economic sense. Installation of the AutoFlush® Unit is quick and simple without the need for electrical or plumbing trades for installation—you don't even have to turn the water off. The AutoFlush® is the easiest and most cost effective way to gain the benefits of an automatic flushing system—No more unflushed fixtures, foul odors, and damage from handle abuse by people not wanting to touch the handle.

### Smart Object Infrared Technology

The AutoFlush® infrared *Object Lock Technology* controls flushing like no other system today. You are able to match your flushing needs with the optimum in water conservation, sanitary environment for patrons and occupants of your facilities, and dependable performance.


### Easy 2 Minute Retrofit Installation

No water shut off required and no plumber needed. Simply remove your existing flush handle with the supplied wrench, replace with your new AutoFlush® unit, and tighten the collar nut with the same wrench. Insert supplied batteries, and you have just converted your restroom to a higher standard in hygiene.

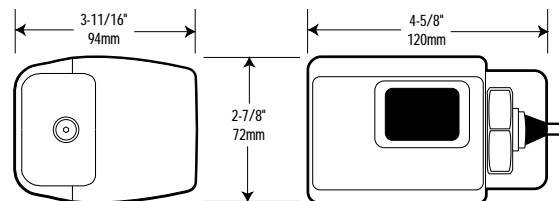


## SANITARY NO TOUCH OPERATION


A) User Approaches

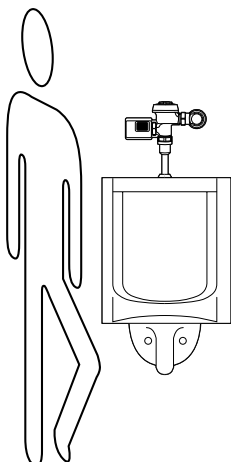


B) Object Lock Infrared Senses User

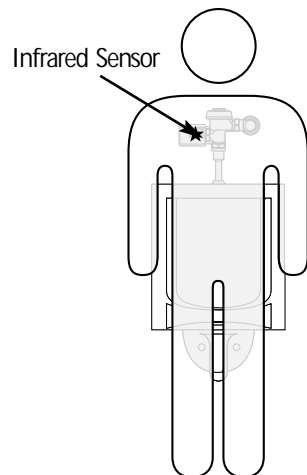

C) Fixture is Flushed as User Walks Away

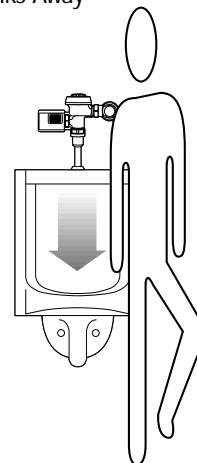

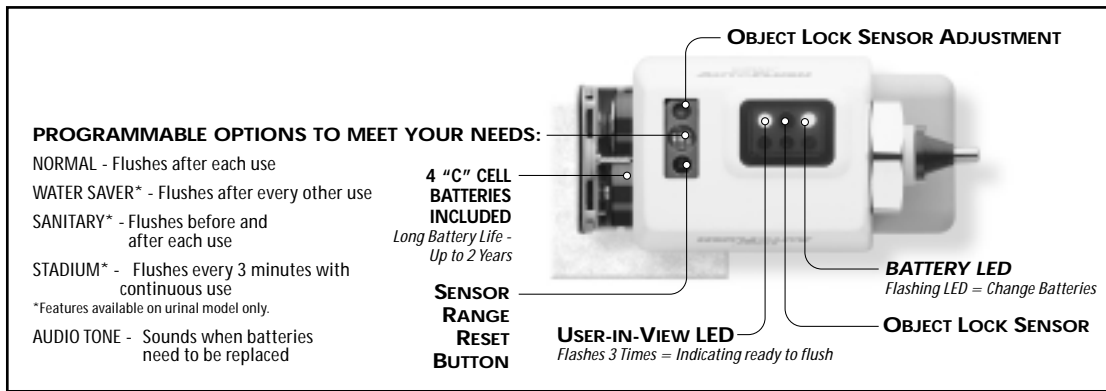

## Specifications

### Product:

AutoFlush® unit, right-hand or left-hand rough, retrofitting.

### Trap Seal Protection:

Flushes fixture once every 24 hours if not used, prevents sewer gases escaping through open trap.

### Valve Type:

Retrofits to all Sloan Royal and Zurn flush valve systems. Adaptable for both left and right hand supply. Works with toilets & urinals.

### Flush Volume:

Operates with any flush volume cycle.

### Power Supply:

4 C-Type alkaline batteries - Included! Up to 3 year battery life under normal operation (36,000 flushes per year).

### Battery Supply:

Up to 80,000 flushes

### Sensor Type:

Infrared convergence type object lock detection. Adjustable range: 8" to 48." (32" factory set)

## Modes Of Operation:

### NORMAL MODE:

- Flushes fixture after each use.

### WATER SAVER:

- Flushes fixture after every other use.

### SANITARY:

- Flushes fixture before and after each use.

### STADIUM:

- Flushes fixture every three minutes when in use.

Urinal AutoFlush Only

### User In View L.E.D.:

Green light flashes 3 times when user is detected for 5 seconds.

### Battery Replacement L.E.D.:

Yellow light flashes when batteries are low.

### Battery Replacement Tone:

Optional audio tone reinforces yellow LED (change batteries).

### Installation Time

Easy 2 minute installation. Water does not need to be shut off.

### Compliance:

Designed to meet A.D.A. requirements.

### Warranty:

3 years against defects in parts and workmanship. Successfully tested 1 million flushes!

### High Mount Adapter:

Angles AutoFlush® unit down 27.5° (part # 401096).

### Allen Wrench:

3mm / 1/8" allen wrench - Included.



### European Office Netherlands:

**AtaTula Services**  
R Kochlaan 660  
2035 BW Haarlem, Netherlands  
Phone: +31 23 5365878  
Fax: +31 23 5407830

### Caribbean Office:

*Serving the Caribbean Area*

**AtaTula Services**  
P.O. Box 3805  
Willemstad, Curacao, Netherlands Antilles  
Phone: +599 9 888 22 83  
Fax: +599 9 888 22 84